



“Americian Standard” roller chain and links



American Standard roller chain to ISO 606 / DIN 8188 standard
Sold in 5 meter lengths

Ref.	ISO	ASA	P (inch)	P (mm)	Inner width mm (W)	Roller Ø mm (R)	Pin Ø mm (D)	Min. breaking load (kg)
93/6280-1	08 A-1	40-1	1/2	12,70	7,85	7,92	3,98	1550
93/6280-2	10 A-1	50-1	5/8	15,875	9,40	10,16	5,09	2450
93/6280-3	12 A-1	60-1	3/4	19,05	12,57	11,91	5,96	3490
93/6280-4	16 A-1	80-1	1	25,40	15,75	15,88	7,94	6250
93/6280-5	20 A-1	100-1	1 1/4	31,75	18,90	19,05	9,54	9740
93/6280-6	24 A-1	120-1	1 1/2	38,10	25,22	22,23	11,11	14000

Connecting links to ISO 606 / DIN 8188 standard

Ref.	ISO	ASA	P (inch)	P (mm)
93/6281-1	08 A-1	40-1	1/2	12,70
93/6281-2	10 A-1	50-1	5/8	15,875
93/6281-3	12 A-1	60-1	3/4	19,05
93/6281-4	16 A-1	80-1	1	25,40
93/6281-5	20 A-1	100-1	1 1/4	31,75
93/6281-6	24 A-1	120-1	1 1/2	38,10



Halk links to ISO 606 / DIN 8188 standard


Ref.	ISO	ASA	P (inch)	P (mm)
93/6277-1	08 A-1	40-1	1/2	12,70
93/6277-2	10 A-1	50-1	5/8	15,875
93/6277-3	12 A-1	60-1	3/4	19,05
93/6277-4	16 A-1	80-1	1	25,40
93/6277-5	20 A-1	100-1	1 1/4	31,75
93/6277-6	24 A-1	120-1	1 1/2	38,10



We can by request, cut and supply chain to your desired length



“increased American Standard” roller chain and links

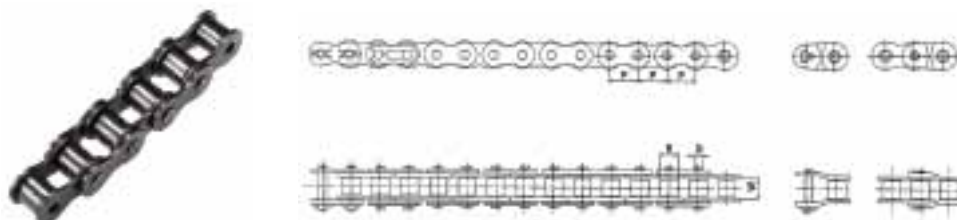

Increased American Standard roller chain to ISO 606 / DIN 8188H standard
Sold in 5 metre lengths

Ref.	ISO	ASA	P (inch)	P (mm)	Inner width mm (W)	Roller Ø mm (R)	Pin Ø mm (D)	Min. breaking load (kg)
93/6275-1	12AH-1	60H	3/4	19,05	12,57	11,91	5,96	13960
93/6275-2	16 AH-1	80H	1	25,40	15,75	15,88	7,94	25000
93/6275-3	20 AH-1	100H	1 1/4	31,75	18,90	19,05	9,54	38960
93/6275-4	24 AH-1	120H	1 1/2	38,10	25,22	22,23	11,11	56000

Connecting links to ISO 606 / DIN 8188H standard

Ref.	ISO	ASA	P (inch)	P (mm)
93/6273-1	12 AH-1	60H	3/4	19,05
93/6273-2	16 AH-1	80H	1	25,40
93/6273-3	20 AH-1	100H	1 1/4	31,75
93/6273-4	24 AH-1	120H	1 1/2	38,10



Half links to ISO 606 / DIN 8188H standard


Ref.	ISO	ASA	P (inch)	P (mm)
93/6274-1	12 AH1	60H	3/4	19,05
93/6274-2	16 AH1	80H	1	25,40
93/6274-3	20 AH1	100H	1 1/4	31,75
93/6274-4	24 AH1	120H	1 1/2	38,10



We can by request, cut and supply chain to your desired length



“British Standard” roller chain and links

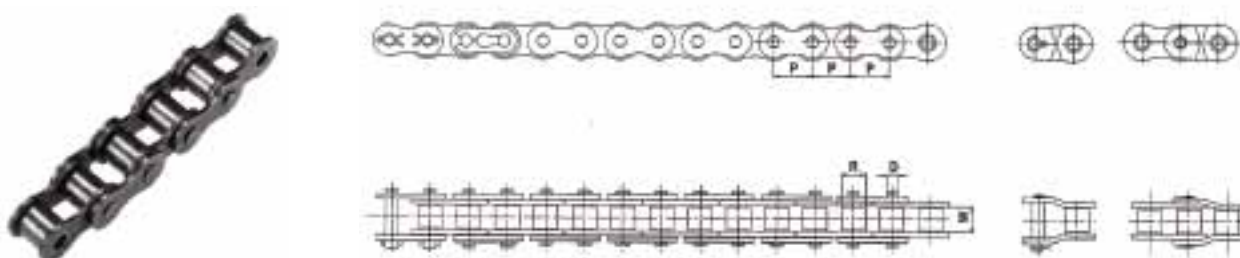

British Standard roller chain to ISO 606 / DIN 8187 standard
 Sold in 5 metre lengths

Ref.	ISO	P (inch)	P (mm)	Inner width mm (W)	Roller Ø mm (R)	Pin Ø mm (D)	Min. breaking load (kg)
93/6278-1	08 B-1	1/2	12,7	7,75	8,51	4,45	1820
93/6278-2	10 B-1	5/8	15,875	9,65	10,16	5,08	2270
93/6278-3	12 B-1	3/4	19,05	11,68	12,07	5,72	2950
93/6278-4	16 B-1	1	25,4	17,02	15,88	8,28	6130
93/6278-5	20 B-1	1 1/4	31,75	19,56	19,05	10,19	9700
93/6278-6	24 B-1	1 1/2	38,1	25,4	25,4	14,63	16330

Connecting links to ISO 606 / DIN 8187 standard

Ref.	ISO	P (inch)	P (mm)
93/6279-1	08 B-1	1/2	12,7
93/6279-2	10 B-1	5/8	15,875
93/6279-3	12 B-1	3/4	19,05
93/6279-4	16 B-1	1	25,4
93/6279-5	20 B-1	1 1/4	31,75
93/6279-6	24 B-1	1 1/2	38,1



Half links to ISO 606 / DIN 8187 standard

Ref.	ISO	P (inch)	P (mm)
93/6276-1	08 B-1	1/2	12,7
93/6276-2	10 B-1	5/8	15,875
93/6276-3	12 B-1	3/4	19,05
93/9276-4	16 B-1	1"	25,4
93/6276-5	20 B-1	1 1/4	31,75
93/6276-6	24 B-1	1 1/2	38,1



We can by request, cut and supply chain to your desired length





Tools



Chain Splitter Tool

(for Simplex and Duplex chain)

For the clean and effortless removal of Simplex and Duplex chain links.

- | | |
|------------------|---------------------------------------|
| 74/9518-1 | pitch of 9.5 ASA to 19.05 inclusive |
| 74/9518-2 | pitch of 19.05 ASA to 31.75 inclusive |